


PERMA “R” PRODUCTS

WE’VE GOT YOU COVERED.

TECHNICAL DATA SHEET

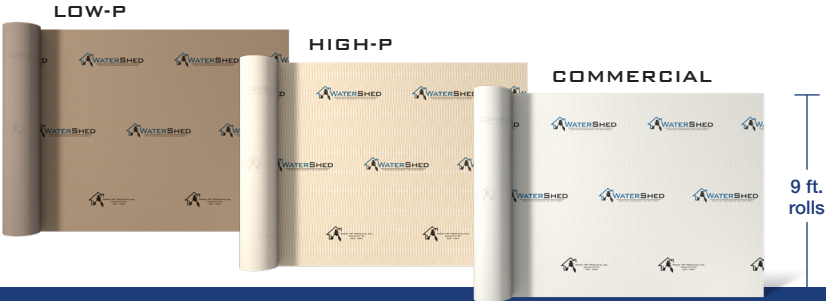

CHOOSE YOUR DRAINAGE WRAP

SPECIFICATIONS	WaterShed® LP	WaterShed® HP	WaterShed® Commercial
Composition	Non-Woven, Non-Perforated Polypropylene	Non-Woven, Non-Perforated Polypropylene	Non-Woven, Non-Perforated Polypropylene
Weight	2.2 lbs./yd ² (+/-5%)	2.2 lbs./yd ² (+/-5%)	2.3 lbs./yd ²
Thickness	8.0 mils	8.0 mils	8.0 mils
Tensile Strength	MD 45 lb • CD 45 lb	MD 45 lb • CD 45 lb	MD 45 lb • CD 45 lb
Tear Strength	MD 13.5 lb • CD 12.5 lb	MD 13.5 lb • CD 12.5 lb	MD 13.5 lb • CD 12.5 lb
Water Resistance	>300 cm	>300 cm	>300 cm
MTVR/Perms	15 perms	55 perms	35 perms
UV Resistance	180 days	180 days	180 days
Fire Rating	Class A	Class A	Class A

AVAILABLE SIZES

WaterShed LP/HP	9' x 100'	9' x 150'	9' x 195'
	10' x 100'	10' x 150'	10' x 195'
WaterShed Commercial	10' x 100'	10' x 150'	10' x 195'

WaterShed® LP, HP, & Commercial Drainage House Wrap

FOR USE AS A REPLACEMENT FOR GRADE D PAPER AS A MOISTURE, AIR INFILTRATION BARRIER, AND DRAINAGE WRAP.

Meets the following certifications: Complies with ICC-ES AC308 “Water-Resistive Barriers/Weather Barriers”.
ICC report No. ESR-4665

DISCLAIMER: The information presented herein has been compiled from sources considered to be accurate and reliable but is not guaranteed to be so. In practice, the differences in materials, substrates, storage conditions, actual site conditions and other factors outside of Perma “R” Products’ control are such that Perma “R” Products assumes no liability, nor makes any warranty, express or implied for such information, recommendations or instructions related to its products. It is the user’s responsibility to determine the suitability of any material for specific purposes and to adopt such safety precautions as may be necessary.

PRP_WS-HW-TDS_06-25

