

FLASHING TAPE

WE'VE GOT YOU COVERED

Don't Forget the Tape!

Perma R's PermaTAK™ Straight and ProTAK™ Stretch offer outstanding moisture protection and provide the ultimate line of defense around windows, doors, and thru-wall penetrations. When installed according to specifications shown in our flashing system installation guide, these flashing tapes provide a superior weather-tight seal to protect from moisture, leaks, and air penetration.



PermaTAK™ Straight Flashing Tape

- Provides permanent weathertight seal on most common building materials
- Slow acting adhesive for easy repositioning
- Excellent cold temperature adhesion
- Self-healing after puncture
- Compatible with sealants and caulking
- Free of asphalts, VOCs, and solvents
- Meets AAMA 711
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance under LEED)
- Easy to remove release liner

PROPERTIES	SPECS
Adhesive Composition	Clear Butyl Rubber
Thickness	14 mil
Installation Temp Range	-10°F - 176°F
Operating Temp Range	-30°F - 200°F
Nail Sealability	PASS
UV Exposure Rating	Up to 12 Months
Shelf Life	36 Months
Warranty	20-year System Limited Lifetime

Recommended Storage Conditions: 60-80°F at 40-60% RH

SIZE	PER CASE	PALLET	PART #
4" x 75'	12	27	75412
6" x 75'	8	27	75608



ProTAK™ Stretch Flashing Tape

- Stretches more than double to conform to curves and corners eliminating need for corner flashing patches at window sides
- Slow acting adhesive for easy repositioning
- Superior adhesion to wood, aluminum, vinyl, rigid board insulation, and other common building materials
- Easy to remove release liner
- Self-healing after puncture
- Compatible with sealants and caulking
- Free of asphalts, VOCs, and solvents
- Meets AAMA 711

PROPERTIES	SPECS
Adhesive Composition	Butyl Rubber
Thickness	50 mil
Installation Temp Range	40°F - 180°F
Operating Temp Range	-30°F - 200°F
Nail Sealability	PASS
Tensile Strength	>400 to 295 PSI
Water Vapor Transmission Rate	<0.2 g/100in ² /24 hrs
UV Exposure Rating	Up to 12 Months
Shelf Life	36 Months
Warranty	20-year System Limited Lifetime

Recommended Storage Conditions: 60-80°F at 40-60% RH

SIZE	PER CASE	PALLET	PART #
6" x 75'	1	45	75601
9" x 75'	1	45	75901

Scan me for more information!



permarproducts.com | 800-647-6130

Individual jurisdictions and principalities may vary. Check with your local building officials for approval and acceptance.


FLASHING TAPE

INSTALLATION STEPS

Avoid Costly Callbacks

Incorporate flashing as part of an overall drainage plane to control the directional flow of water and moisture.

Studies show that inadequate design and construction of flashings are responsible for a high percentage of window and door leaks. Poor design detail is one of the most common causes of building envelope defects and builder callbacks. When installed properly, the Perma "R" flashing system can intercept and direct the flow of water to designed drainage paths to prevent water from penetrating the building. Both Perma R's ProTAK Stretch and PermaTAK Straight have self-sealing properties that can stop leaks around fasteners that may later be driven through the adhesive.

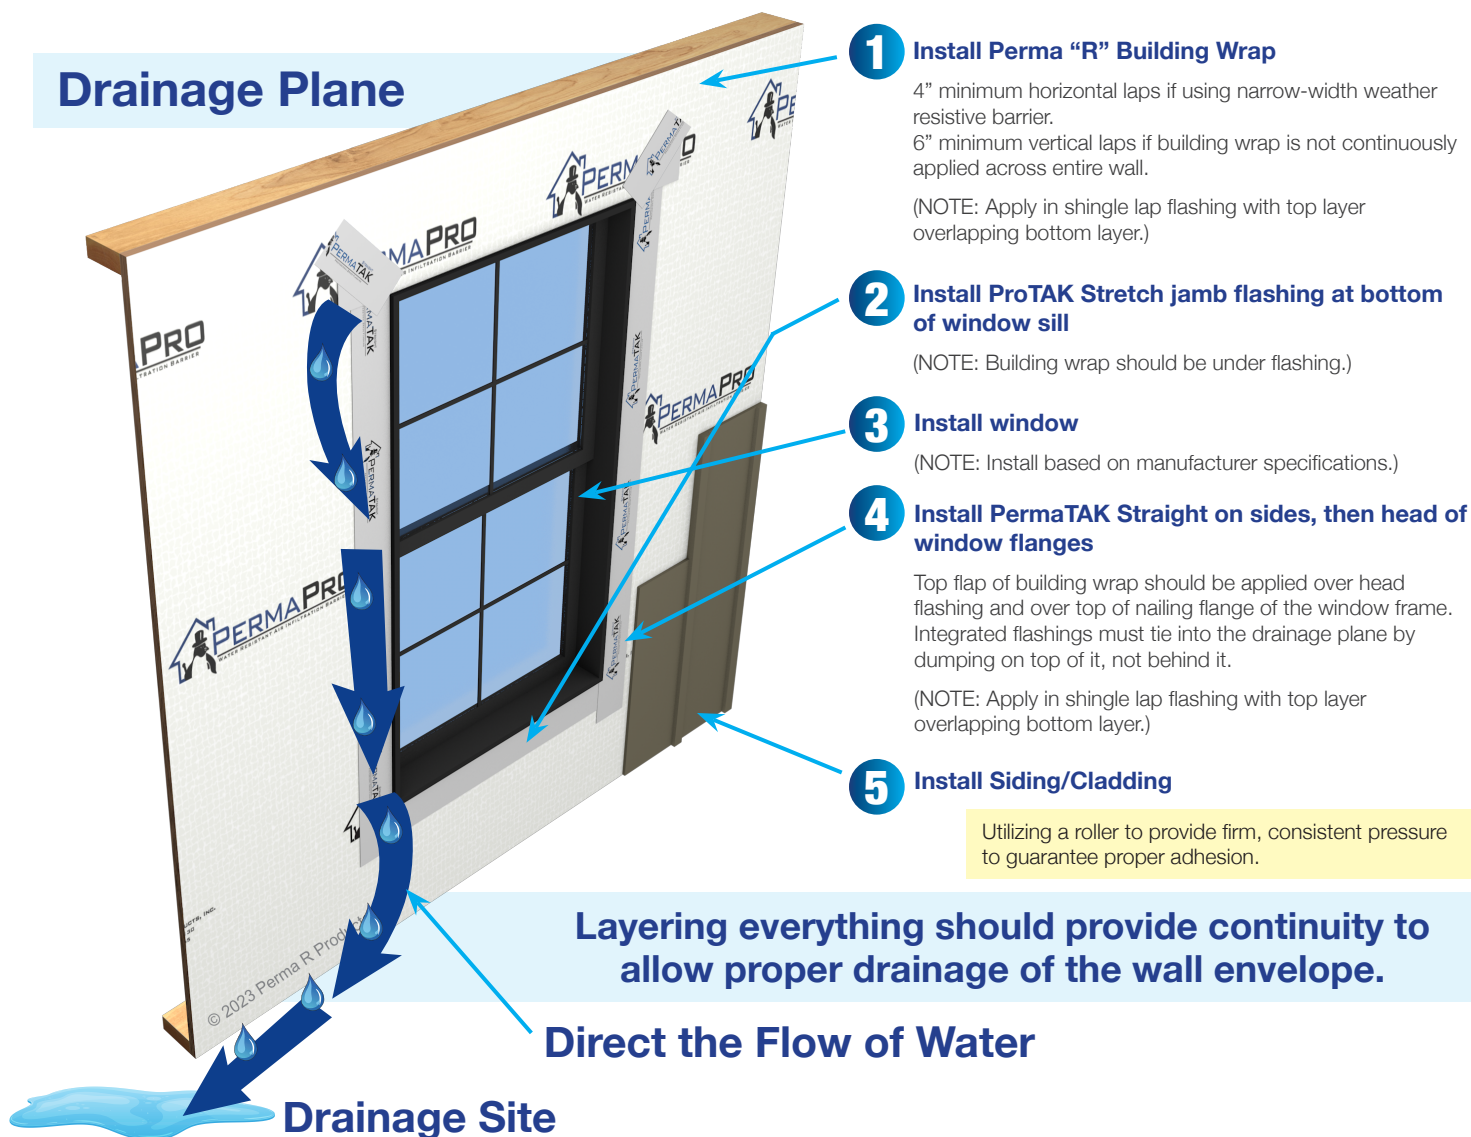

Perma "R" Building Products assumes no liability, expressed or implied, as to the architecture, engineering, or workmanship of any project. This information may be concurrent with, or superseded by other applicable documents. Contact Perma "R" Building Products for further information or technical support.

*Due to the variable surface of substrates such as OSB, concrete, CMU and fiberglass gypsum board adhesion should be tested prior to installation, as a primer may be required to ensure adequate adhesion.



permarproducts.com | 800.647.6130

© 2024 Perma "R" Products, Inc. | Member of INDEVCO North America

PRP FLSH TAPE_SS 07-24